

# The best technology for YOUR best wave



**Extra large face**  
to create the largest,  
cleanest wave.

## Strong Magnetic Grip

Holds FlipSurf® onto  
the boat better than  
suction cups or Velcro  
and is easier to remove  
too! Guaranteed.



## Adjustable Angles

Customize your wave to  
create your perfect wave.

**Light, durable  
material that floats**

## Collapsible

Saves space by  
collapsing for  
easy storage.



## Switch Sides

of the boat in seconds!

Scan for  
promo video



## Driving Tips

Thank you for your Purchase of FlipSurf® Wake Shaper. We would like to provide some driving tips to ensure you get the most enjoyment out of your FlipSurf®. There are some rare occasions that your driving conditions can lead to your FlipSurf® coming off the mounting bracket. By following these driving tips, you will get the most enjoyment from your surfing experience. Please don't hesitate to contact us if you have any questions.

- Always remove FlipSurf® when not surfing.
- FlipSurf® is designed to stay attached to the boat when moving but when the boat stops, it is designed to come off for easy removal. If you stop and a large wave comes from behind the boat or the boat is rocking due to choppy water or large waves, make sure the wave did not push the FlipSurf® off.
- If you start going forward and your wave does not grow and curl over by the time you hit 9 mph, your FlipSurf® may have come off the bracket and you need to stop and pick it back on. If your wave does not look amazing, stop and check that your FlipSurf® is still attached.
- Do not leave your FlipSurf® out in direct sunlight or exposed to high temperatures for extended periods of time when it is not in use.

FlipSurf Customer Service  
sales@flipsurfwake.com  
801-675-8730

[www.flipsurfwake.com](http://www.flipsurfwake.com)

Pat. # 11,001,341

# FLIPSURF




## The Future of Surf Wave Technology

## Installing Your FlipSurf®

### Step 1




Thoroughly clean near the rear starboard and port sides with residue free cleaner such as 70% Isopropyl alcohol. Installation should be done when boat, product, and ambient temperature are above 70°F.

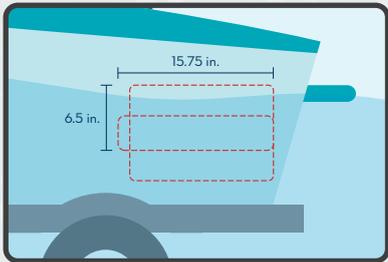

### Step 2


FlipSurf® requires 6.5" x 15.75" of flat surface to mount to. Once located, align FlipSurf so top edge sits 1-2" above or below the waterline when ballasts are full. Position as far back on the boat as possible.

Scan for  
installation video

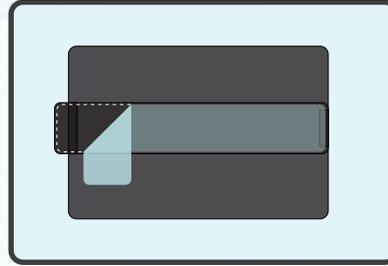

### Step 3

Peel off adhesive backing.

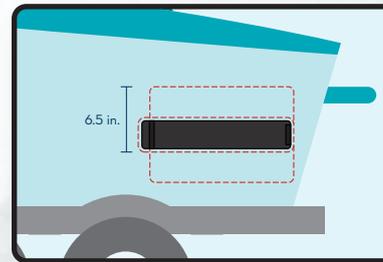

### Step 4

Firmly press onto boat in the location identified in Step 2. Allow strip to sit for 72 hours before use or submerging in water.

If FlipSurf® does not fit your boat,  
contact us for more information on our  
shims! 801-675-8730

## ⚠ CAUTION

FlipSurf® contains strong magnets. Persons with medical implants or other medical devices, credit/debit cards, cell phones, hard drives, etc. should remain 3ft (1m) from product.

Do not adjust FlipSurf® while the boat is in motion. Possible pinch hazard.

This product is intended for inboard boats only.  
Do not use with outboard boats.

Do not use at speeds in excess of 15 mph.  
Remove FlipSurf® when not surfing.

The waterline on these boats is represented by the . FlipSurf® should be installed where the top edge is within 2 inches of the waterline. For best performance, angle the front of the Magnetic Bracket down 5 degrees like on the Malibu Wakesetter.

2006  
Moomba  
Mobius



2003  
Centurion  
Eclipse



2020  
Heyday  
WT-DC



2002  
Malibu  
Wakesetter



Questions? Call 801-675-8730